

Technical sheet No 93GM/KAR


1. Supplier name: **GÓRALMET Sp. z o.o.**

Supplier address: **ul. Krakowska 68, 32-860 Czchów, tel/fax 014 6635260**

2. Product name: **Grade 3 technical chain - 766, hot dip galvanized**

3. Description and use: Electric welded, hot dip galvanized and calibrated short link chains, for use as machinery equipment and the other general applications. For use within technical parameters given in point 5.

4. Grade 3 technical chain - 766, hot dip galvanized cannot be used in the applications that has safety requirements regulated by law or standards, for example for lifting. Do not overload over WLL (kG) given in column 10.

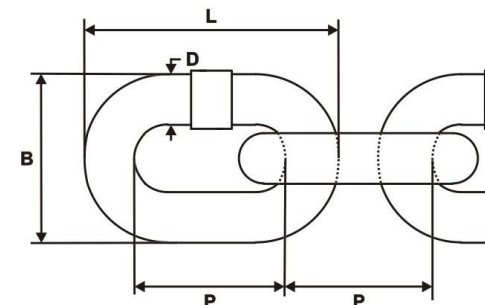

5. Technical parameters:

No	Size D [mm]	Dimensions [mm]						Weight [kg/m]	WLL Working load [kG]	BF Breaking force [min. kG]	Material	Coatings
		D [tol]	P	P [tol+]	P [tol-]	B [max]	L [max]					
1	2	3	4	5	6	7	8	9	10	11	12	13
1	5	±0,2	18,5	0,4	0,2	17	29,3	0,474	320	1280	C10 ~ C15	Hot dip galvanized
2	6	±0,2	18,5	0,4	0,2	20,4	31,3	0,713	400	1600		
3	7	±0,3	22	0,4	0,2	23,8	37	0,960	630	2520		
4	8	±0,3	24	0,4	0,2	27,2	41	1,268	800	3200		
5	10	±0,4	28	0,5	0,3	36	49,3	2,139	1250	5000		
6	13	±0,5	36	0,6	0,3	47	63,6	3,911	2000	8000		

6. Additional informations:

- Safety factor - 4,
- BF =4,0 x WLL
- Additional informations – label: product name; size; quantity; order No; manufacturer's data and website address.