

Technical sheet No 26GM/KAR


1. Supplier name: **GÓRALMET Sp. z o.o.**

Supplier address: **ul. Krakowska 68, 32-860 Czchów, tel/fax 014 6635260**

2. Product name: **Nickel plated double pulley with swivel eye**

3. Description and use: Pulley with double steel wheels and swivel, designed for manual lifting and hanging with the use of wire ropes. For use within technical parameters given in point 5.

4. Nickel plated double pulleys with swivel eye cannot be used in the applications other than described in point no 3. Do not overload over WLL (kG) given in column 13.

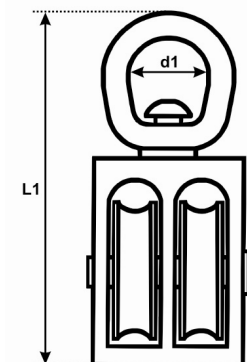

5. Technical parameters:

| No | Size | Nominal dimensions [mm] | | | | | | | | | Weight [kg/pc] | WLL Working load [kG] | BF Breaking force [min. kG] | Material | Coatings |
|----|--------|-------------------------|---------|-------------------|-----|-----|-----|-----|-----|-----|----------------|-----------------------|-----------------------------|--|---|
| | | d1 [mm] | L1 [mm] | For rope max [mm] | --- | --- | --- | --- | --- | --- | | | | | |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| 1 | 1/2" | 10 | 49 | 4 | --- | --- | --- | --- | --- | --- | 0,040 | 30 | 90 | Body, swivel: ZnAl4 Wheels: C15 | Body, swivel: nickel Wheels: brass |
| 2 | 3/4" | 10 | 49 | 5 | --- | --- | --- | --- | --- | --- | 0,045 | 30 | 90 | | |
| 3 | 1" | 10 | 60 | 6 | --- | --- | --- | --- | --- | --- | 0,080 | 30 | 90 | | |
| 4 | 1-1/4" | 20 | 88 | 8 | --- | --- | --- | --- | --- | --- | 0,163 | 60 | 180 | | |
| 5 | 1-1/2" | 20 | 88 | 8 | --- | --- | --- | --- | --- | --- | 0,170 | 60 | 180 | | |
| 6 | 2" | 20 | 105 | 8 | --- | --- | --- | --- | --- | --- | 0,313 | 60 | 180 | | |

6. Additional informations:

- Safety factor - 3
- BF = 3,0 x WLL
- Additional informations – label: product name; size; quantity; order No; manufacturer's data and website address.