

Technical sheet No 25GM/KAR


1. Supplier name: **GÓRALMET Sp. z o.o.**

Supplier address: **ul. Krakowska 68, 32-860 Czchów, tel/fax 014 6635260**

2. Product name: **Nickel plated single pulley with swivel eye**

3. Description and use: Pulley with single steel wheel and swivel, designed for manual lifting and hanging with the use of wire ropes. For use within technical parameters given in point 5.

4. Nickel plated single pulleys with swivel eye cannot be used in the applications other than described in point no 3. Do not overload over WLL (kG) given in column 13.

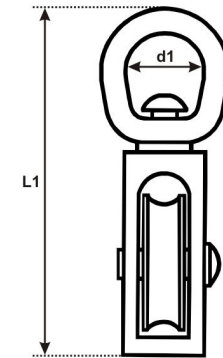

5. Technical parameters:

No	Size	Nominal dimensions [mm]									Weight [kg/pc]	WLL Working load [kG]	BF Breaking force [min. kG]	Material	Coatings
		d1 [mm]	L1 [mm]	For rope max [mm]	---	---	---	---	---	---					
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1	1/2"	10	49	4	---	---	---	---	---	---	0,028	30	90	Body, swivel: ZnAl4	Body, swivel: nickel
2	3/4"	10	49	5	---	---	---	---	---	---	0,030	30	90		
3	1"	10	60	6	---	---	---	---	---	---	0,054	30	90		
4	1-1/4"	20	88	8	---	---	---	---	---	---	0,104	60	180	Wheel: C15	Wheel: brass
5	1-1/2"	20	88	8	---	---	---	---	---	---	0,108	60	180		
6	2"	20	105	8	---	---	---	---	---	---	0,194	60	180		

6. Additional informations:

- Safety factor - 3
- BF = 3,0 x WLL
- Additional informations – label: product name; size; quantity; order No; manufacturer's data and website address.