

## Technical sheet No 145GM/KAR


1. Supplier name: **GÓRALMET Sp. z o.o.**

Supplier address: **ul. Krakowska 68, 32-860 Czchów, tel/fax 014 6635260**

2. Product name: **U-bolt wire rope clip INOX316**

3. Description and use: U-bolt wire rope clips, is a assembly consisting of stainless steel acid-proof U-bolt, bridge and the nuts that allow for two parts of rope to be pressed together when the nuts are tightened. Suitable uses include suspending static loads and hanging, with the use of round steel wire ropes. For use within technical parameters given in point 5. Diameter of selected wire rope should be same as nominal size of the clip.

4. U-bolt wire rope clips INOX316 cannot be used in the applications that has safety requirements regulated by law or standards, for example as the primary securing devices on mine hoists, crane hoists or eye terminations for slings for general lifting service.

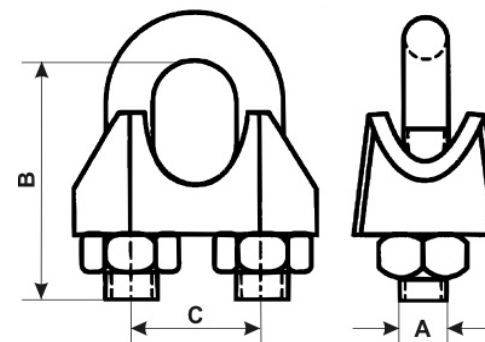

5. Technical parameters:

No	Size	Nominal dimensions [mm]						Weight [kg/pc]	No of grips [min pcs / loop]	Distance betw. grips min-max. [mm]	For wire ropes up to [N/mm <sup>2</sup> ]	
		A [mm]	B [mm]	C [mm]	---	---	---				Fiber core	Steel core
1	2	3	4	5	6	7	8	9	10	11	12	13
1	<b>2</b>	M3	17,5	7,5	---	---	---	0,0067	3	12-24	1770	1570
2	<b>3</b>	M4	16,5	10	---	---	---	0,0125	3	13,5-27	1770	1570
3	<b>4</b>	M5	19,5	10	---	---	---	0,0135	3	16,5-33	1770	1570
4	<b>5</b>	M5	19,5	11	---	---	---	0,0170	3	16,5-33	1770	1570
5	<b>6</b>	M5	24,5	14	---	---	---	0,0210	3	18-36	1770	1570
6	<b>8</b>	M6	28,5	16	---	---	---	0,0360	5	19,5-39	1770	1570

**Material: AISI316**

**Coatings: ---**

6. Additional informations:

- Markings: size code
- Additional informations – label: product name; size; quantity; order No; manufacturer's data and website address.