

Technical sheet No 30GM/KAR


1. Supplier name: **GÓRALMET Sp. z o.o.**

Supplier address: **ul. Krakowska 68, 32-860 Czchów, tel/fax 014 6635260**

2. Product name: **Type "S" hook**

3. Description and use: Steel links for use in agriculture as chain accessory, and the other general applications. For use within technical parameters given in point 5.

4. Type "S" hooks cannot be used in the applications that has safety requirements regulated by law or standards, for example for lifting. Do not overload over WLL (kG) given in column 13.

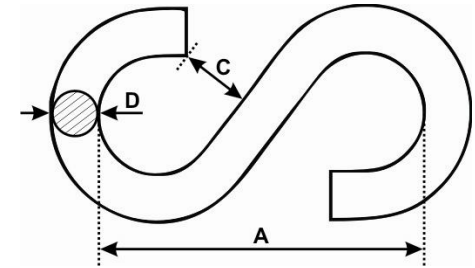

5. Technical parameters:

No	Size D [mm]	Nominal dimensions [mm]									Weight [kg/pc]	WLL Working load [kG]	BF Breaking force [min. kG]	Material	Coatings
		A [mm]	C min [mm]	---	---	---	---	---	---	---					
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1	2.5	27	3.5	---	---	---	---	---	---	---	0.0028	5	12.5	C5-C10	Electro-galvanized
2	3	28	3.5	---	---	---	---	---	---	---	0.0039	10	25		
3	4	31	4	---	---	---	---	---	---	---	0.0083	20	50		
4	5	38	5	---	---	---	---	---	---	---	0.0165	30	75		
5	6	47	7	---	---	---	---	---	---	---	0.0267	50	125		
6	7	56	7	---	---	---	---	---	---	---	0.0453	70	175		
7	8	63	7	---	---	---	---	---	---	---	0.0667	100	250		

6. Additional informations:

- Safety factor - 2,5
- BF =2,5 x WLL
- Additional informations – label: product name; size; quantity; order No; manufacturer's data and website address.