

Technical sheet No 130GM/KAR


1. Supplier name: **GÓRALMET Sp. z o.o.**

Supplier address: **ul. Krakowska 68, 32-860 Czchów, tel/fax 014 6635260**

2. Product name: **Eye-eye EC turnbuckle**

3. Description and use: Cast eye-eye turnbuckle with standard metric right-hand and left-hand thread, for use as tensioning device in general applications. For use within technical parameters given in point 5.

4. Do not overload over WLL (kG) given in column 13.

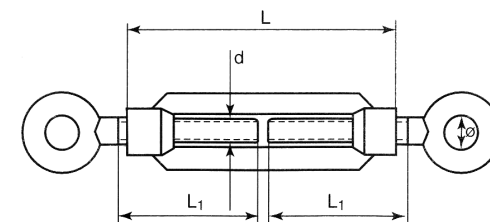

5. Technical parameters:

No	Size (d)	Nominal dimensions [mm]									Weight [kg/pc]	WLL Working load [kG]	BF Breaking force [min. kG]	Material	Coatings
		L [mm]	L1 [mm]	Ø [mm]	---	---	---	---	---	---					
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1	M5	80	40	8,5	---	---	---	---	---	---	0,034	100	300	Body: malleable Termination: C10~C15	Electro-galvanized
2	M6	90	40	9,5	---	---	---	---	---	---	0,049	150	450		
3	M8	110	55	10,5	---	---	---	---	---	---	0,097	200	600		
4	M10	130	60	13	---	---	---	---	---	---	0,163	300	900		
5	M12	140	70	16	---	---	---	---	---	---	0,313	500	1500		

6. Additional informations:

- Safety factor - 3
- BF = 3,0 x WLL
- Markings: size code
- Additional informations – label: product name; size; quantity; order No; manufacturer's data and website address.